

# Straight Blade Devices

## 20A, 125/250V, 3 Pole, 4 Wire Grounding

### Single Receptacle

# HUBBELL



#### Features

- Industrial Heavy Duty Receptacle
- Deep body design
- Impact resistant

#### Ordering Information

Description	Device Color	UPC	Catalog Number
Receptacle, black	Black	783585015705	HBL8410

#### Listings

UL Listed to UL498 File E1706  
 CSA Certified to C22.2 No. 42 File 280C  
 NEMA® WD-6 Compliant

#### Specifications


Body	Nylon
Base	PBT
Contacts	Brass
Mounting Plate	Steel
Terminal Screws	Brass
Terminal Clamp	Nickel plated steel
Mounting Screws	Plated steel
Ground Contact Assembly	Brass

#### Performance

<b>Electrical</b>	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
<b>Mechanical</b>	
Terminal Accommodation	#14-#10 AWG copper stranded or solid conductor only
Terminal Identification	Terminals identified in accordance with UL 498 and CSA
<b>Environmental</b>	
Flammability	UL 94 V-2
IP Suitability	IP20
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)



20A 125V/250V  
 NEMA 14-20R  
 UL CSA  
 2(1) HP

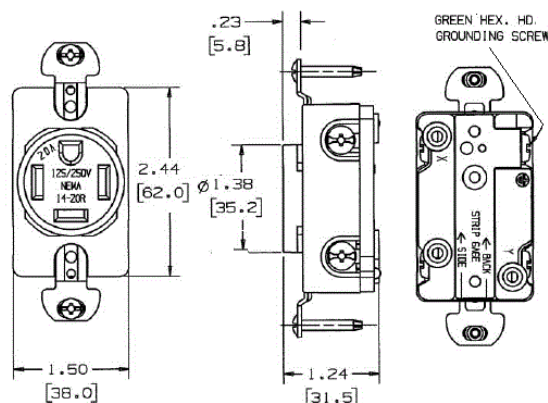

#### Online Resources

Customer Use Drawing  
 eCatalog  
 Installation Instructions

#### Accessories

Wallplate or Weatherproof Cover

1.40" Opening

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

